


Specification


Mode	NS-0262
Pole	2P 36mm
Rated current	1-63A
Over-voltage	230-300V (Default 270V)
Under-voltage	110-210V (Default 170V)
Off delay time	1-30S (Default 5S)
On delay time	1-500S (Default 5S)
Ambient temperature	-20°C-60°C
Electro-mechanical life	100,000
Terminal connection	Grid/flexible cable, pin/fork type busbar

Wiring & Installation

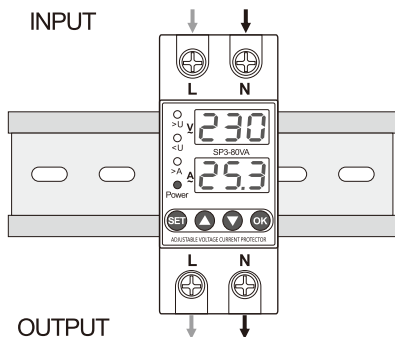

35 Standard
mm Din Rail

Parameter Settings

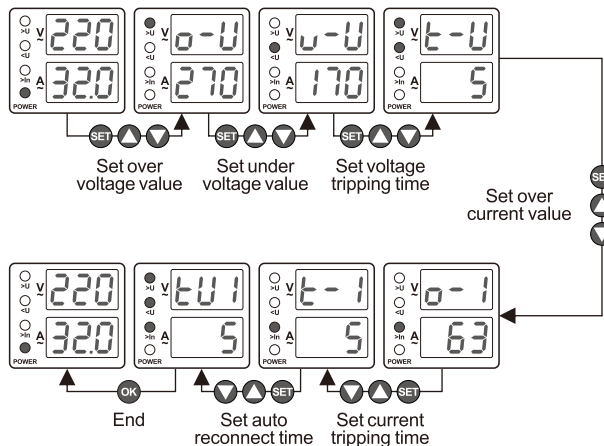

Long press to turn on/off the output



Restore factory settings